



IVANOV. V.A., professor

N.I.Pirogov and some problems of contemporary medicine. Klin.
med. 32 no.8:72-82 Ag '54. (MIRA 7:10)

1. Iz kafedry operativnoy khirurgii i topograficheskoy anatomii (zav. prof. V.A.Ivanov) II Moskovskogo meditsinskogo instituta imeni I.V.Stalina.
(PIROGOV, NIKOLAI IVANOVICH, 1810-1881)

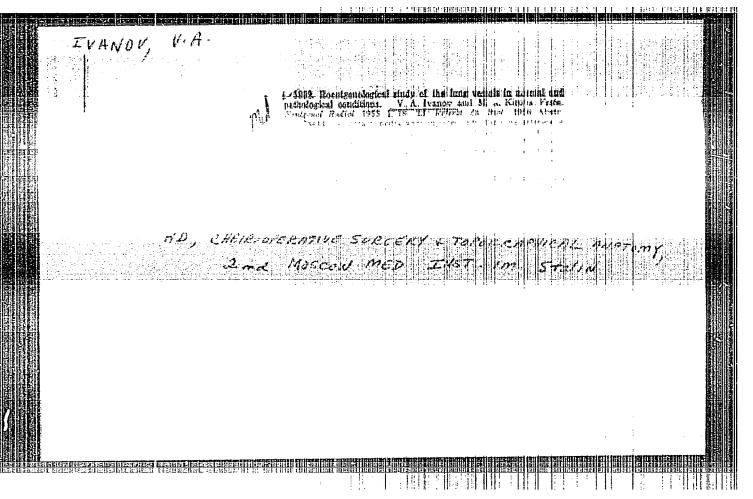

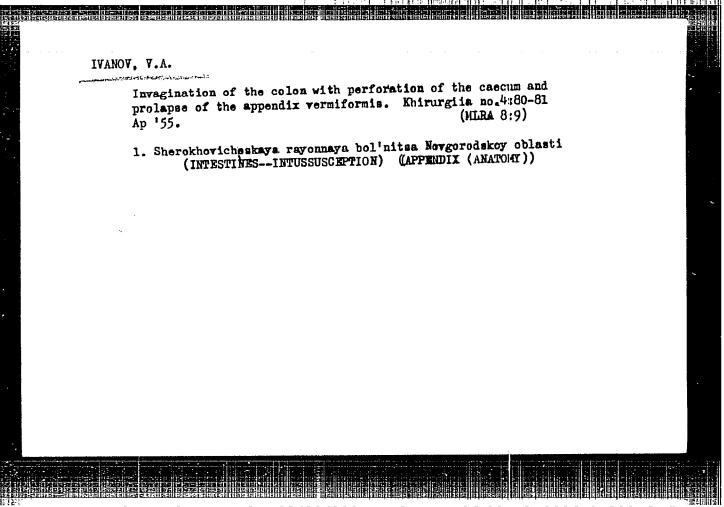

IVANOV, V.A., professor; LOPUKHIN, Yu.M., kandidat meditminakikh nauk.

Experimental cholecystopathy. Khirurgiia, Moskva no.5:15-19 My '55.

(MIRA 8:9)

1. Iz kafedry operativnoy khirurgii s topograficheskoy anatomiyey zav.prof. V.A. 'vanov') II Moskovskogo meditminskogo instituta imeni I.V. Stalima.

(GAILE BLAUDER, dis.

exper.methods)

IVANOV, V.A.

Profuse hemorrhage of a gall bladder ulcer into the gastro-intestinal tract. Vest.khir.76 no.10:127-129 N '55(MLRA 9:1)

1. Iz khirurgicheskogo otdeleniya (zav.--V.A.Ivanov) Shere-khovichskoy rayonnov bol'nitsy.


(GALL BLADDER, ulcers

causing profuse hemorrhage in gastrointestinal tract) (GASTROINTESTINAL SYSTEM, hemorrh.


caused by ulcer of gallbladder)

(HEMORRHAGE

gastrointestinal, caused by ulcer of gallbladder)

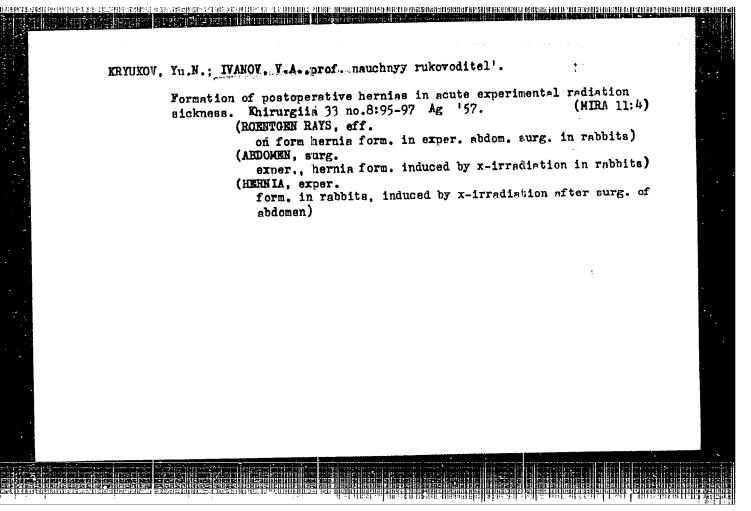

IVANOV.	V.A.	
	To low-up of asymptomatic gastroduodenal ulcers perforated unexpectedly and treated by suturing. Vest.khir. 78 no.3:104-108 Mr 157. (MLEA 10:6)	
	l. Iz khirurgicheskogo otdeleniya (zav. V.A. Ivanov Sherekhovichskoy rayonnoy bol'nitsy. Adres avtora: Novogorodskaya oblast', Lyubytinskiy rayon, s. Sherekhovichi, Sherekhovichskaya rayonnaya bol'nitsa. (PEPTIC ULCER, perf.	
<b>*</b>	surg., follow-up (Rus))	r

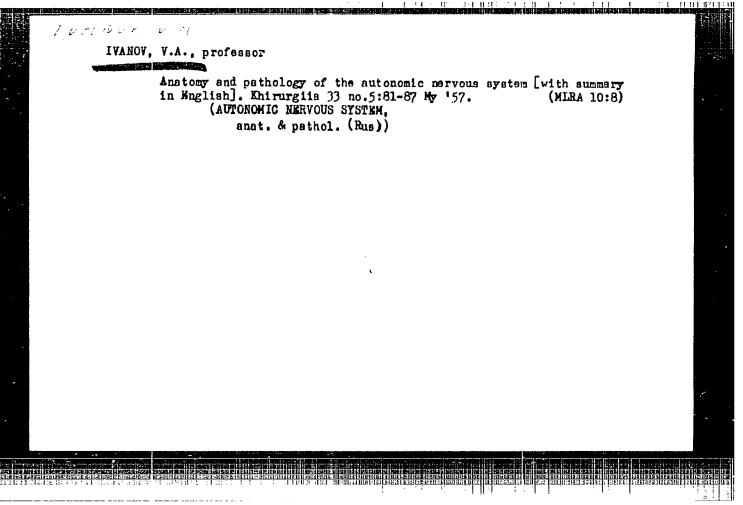


VOZNESENSKIY, Vladimir Petrovich; IVANOV, Vasiliy Alekseyevich

[Operative surgery and topographic enatomy] Operativacia khirurgiis
i topograficheskala anatomiia. Moskve, Madgiv, 1959, 470 p.

(MIRA 13:7)

(SURGERY, OPERATIVE) (ANATOMY, SURGICAL AND TOPOGRAPHICAL)

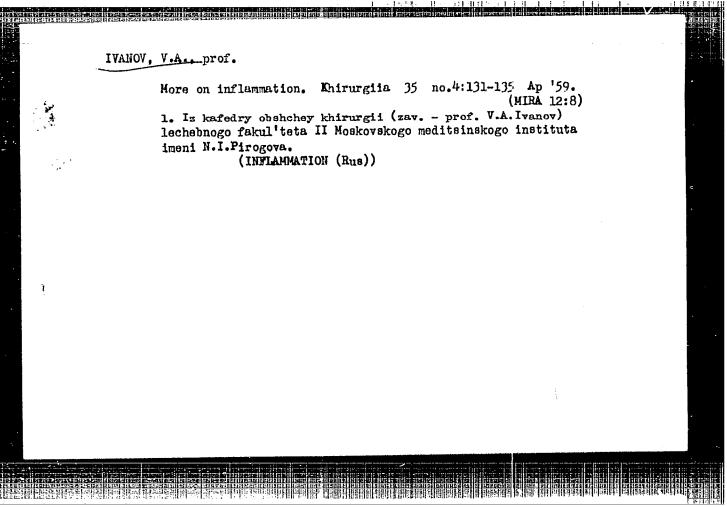

IVANOV, V.A., prof.; SAFRONOV, A.A.

Treatment of trophic ulcers of the lower extremities. Khirurgiia 35 no.7:66-69 Jl '59. (MIRA 12:12)


1. Iz kliniki obshchey khirurgii lechebuogo fakul'teta (dir. - prof. V.A. Ivanev) II Moskovskogo gosudarstvennogo meditsinskogo instituta im. N.I. Pirogova na baze 4-y gorodskoy bol'nitsy (glavnyy vrach - zasluzhennyy vrach RSFSR M.V. Ivanyukov).


(LEG, diseases) (ULCER, therapy)

TVANOV, V.A., (Prof) and MOLODENKOV, M. N. -- Moscow

"The Theory of Cardiospasm."

Report submitted for the 27th Congress of Surgeons of the USSR, Moscow, 23-28 May 1960.

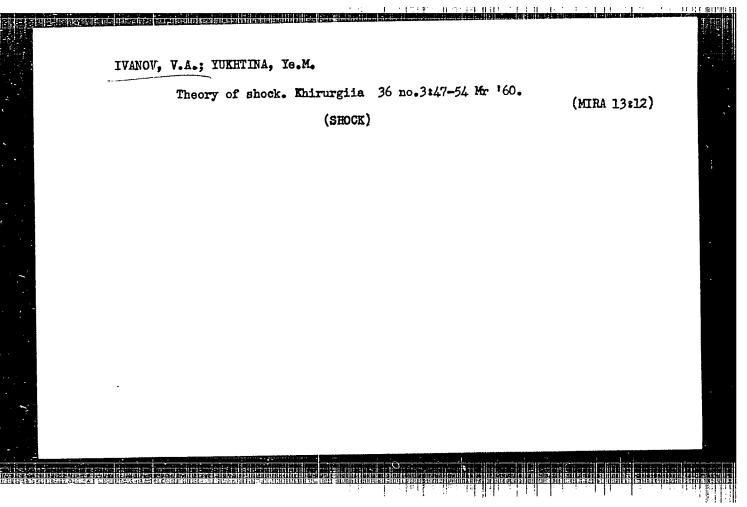

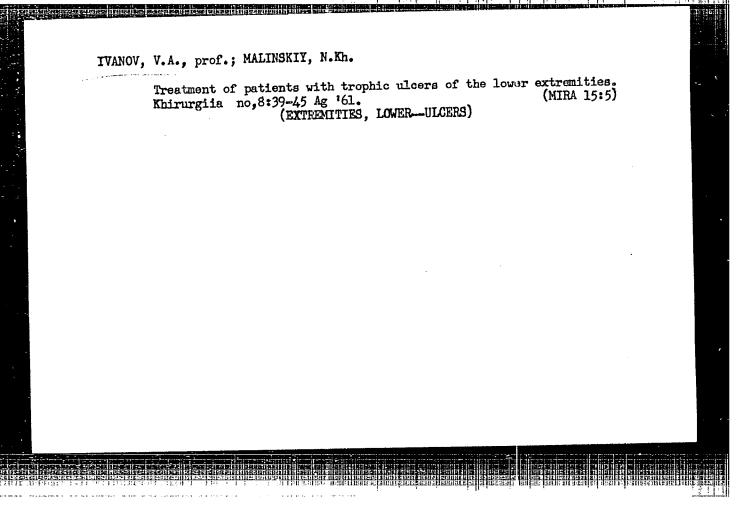

IVANOV, V.A., zasluzhennyy vrach RSFSR

Combination of perforating appendicitis with perforating ulcer of the duodenum. Vest.khir. no.9:127-129 '61. (MIRA 15:3)


1. Iz Sherekhovitskov rayonnoy bol'nitsy (glavnyy vrach - V.A. Ivanov) Novgorodskoy oblasti. Adres avtora: Novgorodskaya oblast', Lyubytinskiy rayon, s. Sherekhovich, rayonnaya bol'nitsa. (APPENDICITIS) (DUODENUM--ULCERS)


IVANOV, V. A., prof.; SUPER, N. A.

Surgery for acute cholecystitis. Khirurgiia 37 no.7:3-9 Jl '61. (MIRA 15:4)

1. Iz kliniki obshchey khirurgii (zav. - prof. V. A. Ivanov) lechebnogo fakuliteta II Moskovskogo gosudarstvennogo meditsinskogo instituta im. N. I. Pirogova i 4-y Gorodskoy klinicheskoy bolinitsy (glavnyy vrach G. F. Papko)

(GALL BLADDER -- SURGERY)

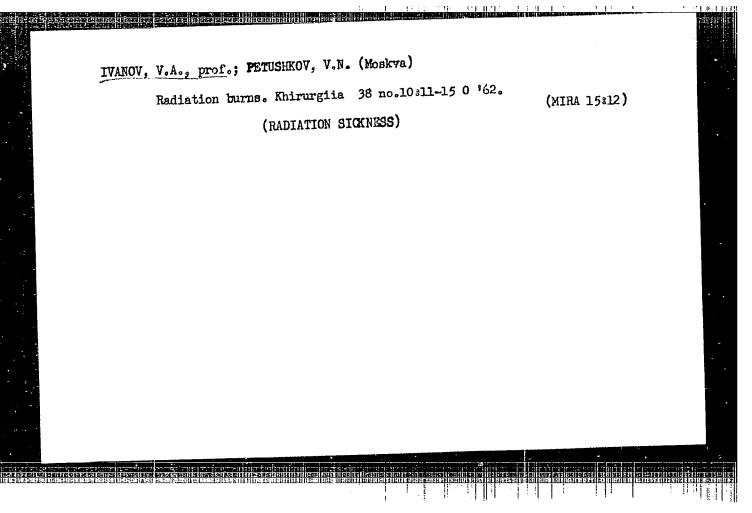

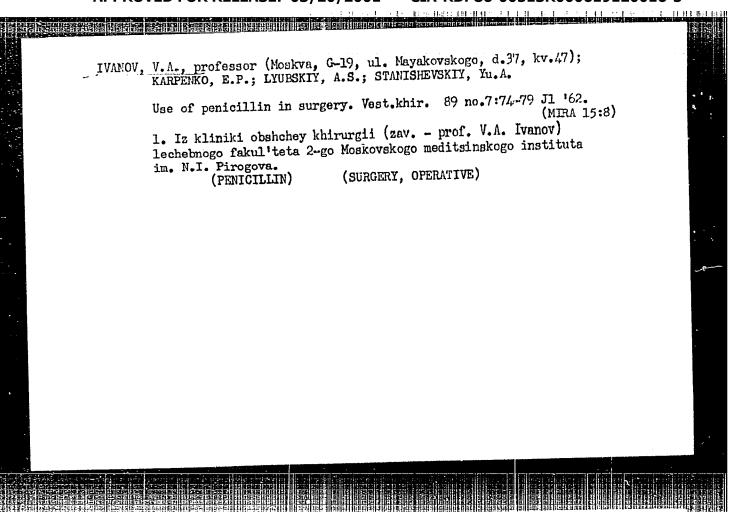

## IVANOV, V.A.

Diagnosis of incompetent sutures in esophago-intestinal analto-mosis. Vest.khir. 89 no.9:117-119 S '62. (MIRA 15:12)

1. Iz Sherekhovicheskoy rayonnoy bol'nitsy (glavny; vrach - V.A.Ivanov). Adres avtora: Novgorodskaya oblast', Lyubytinskiy rayon, s. Sherekhovichi, Sherekhovichskaya rayonnaya bol'nitsa. (ESOPHAGUS-SURGERY) (INTESTINES-SURGERY)

IVANOV, V.A., zasluzhennyy vrach RSFSR

Inadequacy of sutures in esophago-intestinal anastomosis following gastrectomy, Vest.khir.no.1:26-36'63. (MIRA 16:7)

1. Iz Novgorodskogo oblastnogo onkologicheskogo dispansera (glavnyy vrach - A.A.Gorbacheva) i Sherekhovichskov rayonnoy bol'nitsy (glavnyy vrach V.A.Ivanov)

(STOMACH\_SURGERY) (SUTURES)

IVANOV, Vasiliy Alekseyevich; MOLODENKOV, Mikhail Nikolayevich;
IDPUKHIN, Yurly Mikhaylovich; PISAREVSKIY, A.A., red.;
MIRONOVA, A.M., tekhn. red.

[Surgery] Khirurgiia. Moskva, Medgiz, 1963. 426 p.
(MIRA 1616)

(SURGERY)

| IVANOV, V.A., prof.
| Wound and surgical infection. Report No.1. Khirurgiia 39 no.7: 4-13 J1'63 (MINA 16:12)
| 1. Iz kafedry obshchey khirurgii (zav. - prof. V.A. Ivanov) II Moskovskogo gosudarstvennogo meditsinskogo instituta imeni N.I.Pirogova.

IVANOV, V.A.; KUCHMINA, N.Ya. FETISOVA, L.N.

Test with an isolated heart as a rapid method of a preliminary evaluation of the toxicity of sewage and its ingredients. Trudy Vor.med. inst. 4721-46 162

1. Kafedra giglyeny Voronezhskogo meditsinskogo instituta i laboratoriya Voronezhskogo filiala Vsesoyumogo nauchno-issledovatel'skogo instituta sinteticheskogo kauchuka po kharakteristike stochnykh vod proizvodstva sinteticheskogo kauchuka.

IVANOV, V.A., prof.

"Tissue factors" in the physiology of the supparative process. Report No.2. Khirurgiia 39 no.9:29-38 5'63 (MIRA 17:3)

1. Iz kafedry obshchey khirurgii lechebnogo fakul\*tsta ( zav. - prof. V.A. Ivanov) II Moskovskogo gosudarstvennogo meditsinskogo instituta imeni Pirogova.

IVANOV, Vamiliy Alekseyevich; MOLODENKOV, Mikhail Nikolayevich;
MORAYENKOV, A.M., red.

[Neurodystrophic lesion of the internal organs in chronic irritations of the vegetative nervous system] Neirodistroficheskie porazhenia vnutrennikh organov pri khronicheskom razirezhenia vegetativnci nervnoi sistemy. Moskvu, Ned\* tsina, 1964. 115 p.


[MIRA 17 5]

Kartavenko, A.N., prof.; Ivinov, v.A., detsent

Late results of the use of combined preumathorax in the treatment of pulmonary tuberculosis. Sov. med. 27 no.3:9-63 Mr '64. (MIRA 17:11)

1. Kafedra gospitalinoy khirurgii (zav. ~ prof. A.N. Kartavenko)

Smolenskoge meditsinskogo instituta.

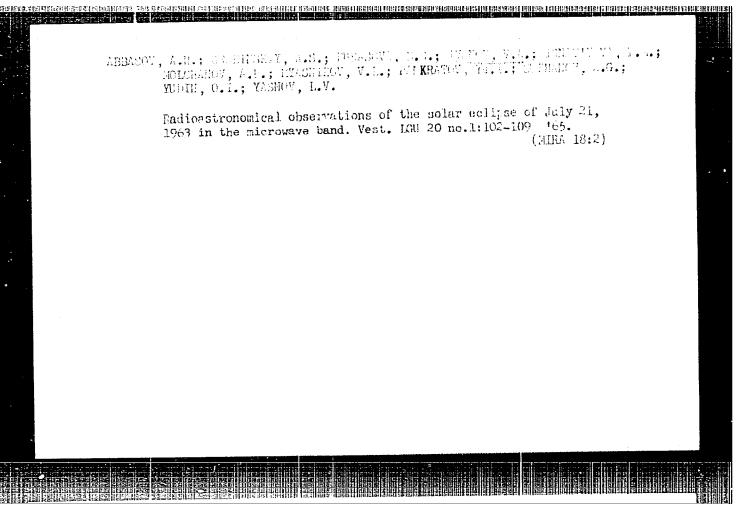

1, 16123-66 PAT (1)/3MA(1) \_\_ .PM ACC NR. AP6003554 SOURCE CODE: UR/0109/66/011/001/0051/0057 AUTHOR: Vikulov, I. K.; Ivanov, V. A.; Mnoyan, V. I.; Tager, A. S. ORG: none TITLE: Superregenerative backward-wave amplifier as SOURCE: Radiotekhnika i elektronika, v. 11, no. 1, 1966, 51-57 TOPIC TAGS: superregenerative amplifier, backward wave amplifier ABSTRACT: In reference to the D. N. Thomson theoretical work (Proc. Nat. El. Conf., 1960, 16, 753-765) and to the R. Walter et al. experimental work in the millimeter band (Proc. IEEE, 1964, 52, 6, 711), the article presents the results of an experimental investigation of an O-type BW amplifier operated at 1-4 Mc under superregenerative conditions. Plots of amplifier gain vs. various parameters (including resonance-curve shapes) are shown. The amplifier frequency spectrum and noise factor were measured. These conclusions are offered: (1) The superregenerative BW amplifier gain is much (30 db) higher than that of the regenerative amplifier; (2) The superregenerator passband can be electrically controlled by varying the frequency and voltage of modulation, while the gain can be maintained constant; (3) The noise factor of the superregenerator is roughly equal to that of the regenerative amplifier. Orig. art. has: 9 figures and 1 table. SUB CODE: 09 / SUBM DATE: 11Sep64 / ORIG REF: 001 / OTH REF: 003 ATD PRESS: 4,205 UDC: 621, 385, 613, 1

SOV/112-57-9-19268

Translation from: Referativnyy zhurnal, Elektrotekhnika, 1957, Nr 9, p 190 (USSR)

AUTHOR: Ivanov, V. A.

TITLE: Units of a Simulator (Bloki modeliruyushchey ustanovki)

se pinestis Leceptigas aigus Hair Phaollaidh a guill agus


PERIODICAL: Sb. rabet po avtomatike i telemekhanike. M., AN SSSR, 1956,

pp 134-145

ABSTRACT: A delay-unit circuit and special converter units for formation of an output voltage that is a linear, parabolic, or exponential function of a mechanical shift value. A capacitor-type delay -unit circuit is presented, the relationship among elements of the circuit is pointed out, and some test results are given with delay times of 1 to 14 seconds. Converter units are based on a differential bridge with inductive pickups, with subsequent rectification and amplification of signals. To form functional relations, the circuit is supplemented by elements using electron-tube characteristics.

I.M.V.

Card 1/1

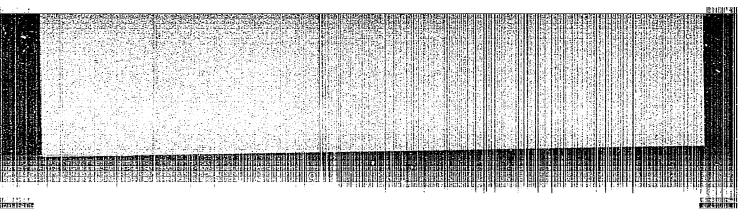

IVAMOV, V. A.: Master Tech Sci (diss) -- "The development and investigation of a system of nutomatic control of welding by electro-turbo welding machines".

Moscow, 1959. 10 pp (Acad Sci USSR, Inst of Automatics and Telemechanics), 130 copies (KL, No 13, 1959, 105)

PHASE I BOOK EXPLOITATION

BOV/4552

Ivanov, V. A., G. P. Solodenko, I. M. Gissin, and N. N. Ignatenko

Kempleksnaya mekhanizatsiya i avtomatizatsiya na zavode Rostsel'mash (Full Mechanization and Automation at the Rostsel'mash [Rostov-na-Donu Agricultural Machinery] Plant). [Rostov-na-Donu] Rostovskoye knizhnoye izd-vo, 1959. 185 p. Errata slip inserted. 2,000 copies printed.

Ed.: I. V. Zherebkov; Tech. Ed.: M. V. Marinyuk.

FURPOSE: This book is intended for technical personnel in plants and design institutes, innovators in production and students of engineering schools of higher education.

COVERAGE: The authors present the results of experience gained from the mechanization and automation of the Rostsel mash Plant. Problems of line production are discussed and ways for solving these problems are considered. The authors describe lines and installations adopted in assembly and press-forging shops. Special attention is paid to the mechanization of organic coating. The final section of the book deals with the full mechanization of foundry processes and

Card 1/2

Full Mechanization and Automation (Cont.) SOV/45		
is based on the experience of the same plant. The authors the L. L. Antonov, A. I. Koryagin, V. A. Shadchinev, G. V. Masher Malokhovskiy who assisted in selecting material for the book references, all Soviet.	UBRIJ CHIC II ILI	
TABLE OF CONTENTS:		
Full Mechanization and Automation of Manufacture	5	
Mechanization and Automation in Assembly Shops Lire production - the basis of mechanization and automation Types and construction of conveyers Mechanization of assembling Mechanization of welding Mechanization of organic coating Coating installations Drying of coated products	12 12 16 30 45 57 63 92	
Mechanization and Automation in Press-Korging Shops and Manufac of Metallic Products	eture 107	
Mechanization and Automation in Foundries  AVAILABLE: Library of Congress  Card 2/2  VK/W	128 vrc/fal 28-60	


DOGANOVSKIY, Stanislav Anatol'yevich; IVANOV, Vasiliy Aleksandrovich; CHELYUSTKIN, A.B., red.; SHIKIN, S.T., tekhn.red.

DATE OF SECTION OF SECTION OF SECTION SECTION

[Controlled time-delay units] Bloki reguliruomogo mapazdyvaniia.

Moskva, Gos.energ.izd-vo, 1960. 61 p. (Biblioteka po avtomatike, no.14).

(Automatic control)

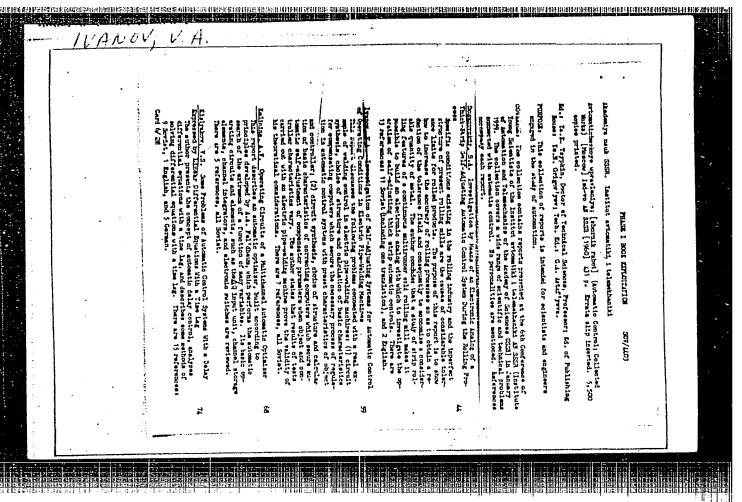

#### CIA-RDP86-00513R000619120016-5 "APPROVED FOR RELEASE: 03/20/2001

8 (5), 28 (1), 25 (2)

\$/105/60/000/02/003/024 B007/B008

AUTHORS:

Chelyustkin, A. B., Candidate of Technical Sciences, Ivanov, V. A.,

Candidate of Technical Sciences

TITLE:

A Self-tuning System for the Automatic Control of the Welding

Process of Electric Tube-welding Machines!

PERIODICAL:

Elektrichestvo, 1960, Nr 2, pp 13 - 18 (USSR)

ABSTRACT:

The systems for the control of production processes are provided with computing devices. These carry out an automatic tuning of their parameters with a variation of the characteristics of the object to be controlled. The parameters of the compensating computation device must therefore be corrected with the variation of the characteristics of the object and the controller. A method (Ref 5) in which such a correction takes place by way of an investigation of the so-called pseudo-cross-correlation

function  $\psi(t) = \int x(t) \cdot f(t - \tau)dt$ , is discussed.  $\tau$  is the

retardation time, f(t) is the disturbance. It follows from the formula that if the invariance condition is fulfilled, the

Card 1/4

**APPROVED FOR RELEASE: 03/20/2001** 

CIA-RDP86-00513R000619120016-5"

A Self-tuning System for the Automatic Control of S/105/60/000/02/003/024 the Welding Process of Electric Tube-welding B007/B008

Machines

(EXTRACE) SECTION OF VERTICAL AND PROPERTY OF THE PROPERTY OF

function  $\psi(t)$  assumes a finite stable value. This method, compared with others, shows a high degree of immunity from disturbance. In a great number of control objects, the transmission factor is the only variable parameter of the characteristic, while the transmission function itself remains practically constant. A welding machine for the electric welding of tubes belongs also to such objects. A tube with different ohmic and inductive resistance can be welded at unchanged time constants of the control circuit for the welding current. The task of the self-tuning consists here in adjusting the nominal value of the transmission factor, which corresponds to the transmission factor of the object, in the compensating computing device. As an example for the application of such a self-tuning system, one for the self-tuning of the welding process in an electric tube welding machine is investigated. The control system of the machine and that during welding respectively is described first. A compensating device is incorporated additionally. It allows to vary the welding current amperage according to the thickness of the sheet metal strip in such a way that the welding

Card 2/4

A Self-tuning System for the Automatic Control of S/105/60/000/02/003/024 the Welding Process of Electric Tube-welding B007/B008

Machines

STATES THE SECTION OF SECTION OF

temperature remains constant. The basic wiring diagram of such a control is shown in figure 3. The working method of the compensating device is described. A second computing device is applied in the self-tuning system to increase the immunity from disturbance. This computes the pseudo-cross-correlation function

 $\varphi(t) = \int_{0}^{t} \Delta \theta \cdot \Delta \delta$  odt,  $\Delta \theta$  being the time function of the tempera-

ture variations at the welding seam and  $\Delta\delta$  the time function of the variations in thickness. Formulas (7) and (8) are derived. The parameters of the main links of the first compensation device at known object parameters can be determined from these formulas. The transition processes in the self-tuning system are then investigated too. The system described here was tried out in an electric tube welding machine. The welding temperature diagrams for manual and automatic control are shown in comparison in figure 5. It can be seen therefrom, that the temperature variations decrease considerably in the case of automatic control. There are 5 figures and 6 Soviet references.

Card 3/4

A Self-tuning System for the Automatic Control of the Welding Process of Electric Tube-welding

s/105/60/000/02/003/024 B007/B008

Machines

ASSOCIATION: Institut avtomatiki i telemekhaniki AN SSSR (Institute of Automation and Telemechanics of the AS USSR)

SUBMITTED:

July 14, 1959

Card 4/4

CIA-RDP86-00513R000619120016-5" **APPROVED FOR RELEASE: 03/20/2001** 

#### S/114/60/000/006/007/008 E194/E355

AUTHORS: Berenshteyn, M.G., Ivanov. V.A. and Ponomarev, I.M.

TITLE: An Electrical Manometer Constructed by BMZ

PERIODICAL: Energomashinostroyeniye, 1960, No. 6, pp. 37 - 38

TEXT: In various kinds of transient tests on steam turbines, for example, in tests of load-throwing, it is often necessary to measure variable pressures. Because of their inertia ordinary manometers are not satisfactory for this purpose, even when cine-film recordings are made of their readings. In testing the hydrodynamic control system of turbine type ATT-12-1 (APT-12-1), BMZ (Bryansk Machine Building Works) used an electrical manometer of low inertia. The principle of operation is that a strain gauge is fixed to a diaphragm that distorts under the pressure. The particular diaphragms used were 90 mm diameter and the thickness ranged from 1.5 mm for a maximum pressure of 4 kg/cm² to 4.7 mm for a maximum

Card 1/2

9,3260 (3302,2104,1067) \$\frac{\$5/109/60/005/011/003/014}{\$140/\$483}\$

AUTHORS: Kapranov, M.V., Ivanov V.A. and Ivanova, N.N.
TITLE: Automatic Phase Control With Nonlinear Filter

PERIODICAL: Radiotekhnika i elektronika, 1960, Vol.5, No.11,

pp.1774-1785

In automatic phase control of oscillator frequency, the TEXT: degree of noise filtering must decrease as the lock-in range increases. The article considers a nonlinear integrating network at the output of the phase detector consisting of opposed biased diodes in parallel with the integrating resistance (Fig. 4). small frequency deviation, hence with low output voltage from the phase detector, the circuit has a high time constant and good filtering properties. At large frequency (phase) excursion, the diodes short-circuit the resistance and the lock-in range approaches its maximum value. The equations of the system are derived assuming that the entire system except the filter is inertialess, the reactance tube characteristic is an unlimited straight line and that frequency modulation is not accompanied by The behaviour of the system is parasitic amplitude modulation. Card 1/2

5/109/60/005/011/003/014 E140/E483 Automatic Phase Control With Nonlinear Filter analysed in the phase plane and four types of limit cycles are The analysis shows that under the given assumptions it is possible to increase the filter time constant without limit while preserving the maximum lock-in band for a given noise level. circuit was verified experimentally and only small differences between the measured and predicted results were found. There are 11 figures and 7 references: 3 Soviet and 4 non-Soviet. January 15, 1960 SUBMITTED: Fig.4. Piic. 4. Card 2/2

22694

S/128/61/000/003/002/008 A054/A127

11500

AUTHORS:

Ivanov, W. A., Kim, G. P.

TITLE:

Casting of experimental batches of turbine wheels from 3N 572

(EI572) steel with investment patterns

PERIODICAL:

Liteynoye proizvodstvo, no. 3, 1961, 4-6

的情况是经验的最终在有效的现在分词,我们就是这样是这样是这样的,这是没有成功,但是是一个的时间,但是这种的人的人们是这种,他们是这种的人,他们是这样的人,他们是

TEXT: At the Chelyabinskiy traktornyy zavod (Chelyabinsk Tractor Plant) a new tractor, type T-130 was designed with a TKP-II(TKR-11) type turbocompressor to perform the function of a booster, which so far has not been incorporated in conventional tractor designs. The most intricate part of this turbocompressor i its wheel which has to work at elevated temperatures, ranging between 600-640°C at a rotational speed of 38,000-42,000 rpm's. It consists of 18 regularly spaced blades with a deviation in pitch of ± 0.3 mm. The finished blade has a thickness of 0.8 ± 0.2 mm at its thinnest part. The wheel is produced by precision casting with investment patterns from the  $\Pi C = 50/50$  (PS 50/50) compound cast in metallic press molds at 43-45°C. A special riser system had to be prepared from the same PS 50/50 compound by press-molding. (Figure 3). The turbine wheels are cast from


Card 1/4

22694 S/128/61/000/003/002/008 A054/A127

Casting of experimental batches...

EI572 steel produced in the MITH-IO2(MGP-102) induction furnace with basic lining. The charge contained, sandblasted and dry steel wante (St.10), Ni, FeW, FeSi-45%, FeMo, electrode sorap etc. In subsequent meltings, 50% of the waste may be reused. Before charging, the furnace is flushed with a carbon-steel melt. The weight of the charge equals 150 kg. Melting is carried out at high speed and the maximum power of the induction generator. To eliminate unfavorable oxidization, a slag-forming mixture, consisting of 85% chromium-magnesite and 15% fluorite was added. After the whole charge was melted it was necessary to cover the whole surface of the molten metal with slag. After having heated the metal up to 1,540 - 1,560°C, the slag was removed and FeNb and low-carbon FeMn were introduced. At 1,600°C Ferrosilicon is added, followed by FeTi. After these additives had dissolved, the slag was removed again at 1,650 - 1,670°C and the oxidizer SiCa was added. Then the molten metal was poured into ladles with a 30-kg capacity, which have been heated up to 600 - 700°C. These ladles have also been lined with chromium-magnesite. Major difficulties of this process is the preparation of the investment pattern blocks consisting of the wheel pattern and the special

Card 2/4

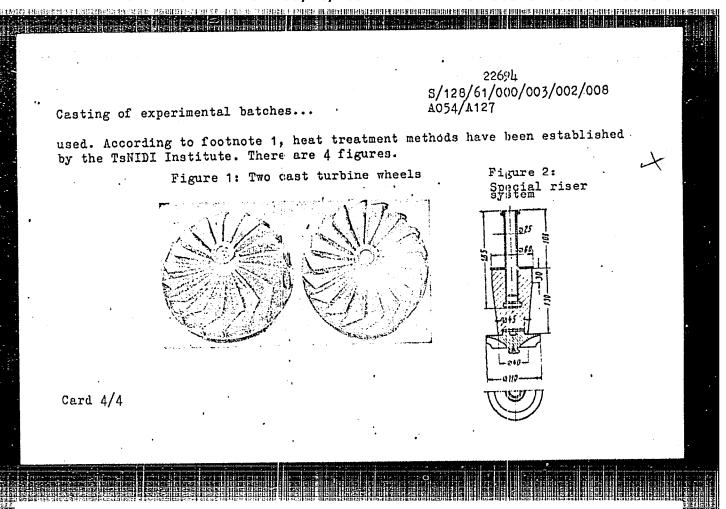

KIRILLOV, I.I., doktor tekhn.nauk, prof.; IVANOV, V.A., inzh.

Frequency analysis of a certain class of equivalent links. Izv.
vys. ucheb. zav.; energ. 4 no.10:60-67 0 '61. (MIRA 14:11)

1. Leningradskiy politekhnicheskiy institut imeni M.I.Kalinina.
Predstavlena kafedroy turbinostroyeniya.

(Automatic control)

IVANOV, V.A., inzh.

Effect of the deviation from static autonomy conditions on the control dynamics of turbines with steam tap-off. Izv. vys. ucheb. zav.; energ. 5 no.3:60-66 Mr '62.

l. Leningradskiy politekhnicheskiy institut imeni M.I.Kalinina. Predstavlena karedroy turbinostroyeniya.

(Steam turbines)

DIYAROV, D.O. (Gur'yev); IVANOV, V.A. (Gur'yev)

Problem of the unsteady flow of a two-phase fluid in a porous medium under elastic conditions. Izv. AN SSSR. Mekh. i mashinostr. no.6:91-92 N-D '63. (MIRA 17:1)

KIRILIOV, I.I., doktor tekhn. nauk, prof.; IVANOV, V.A., kand. tekhn. nauk

Static nonautonomous systems for joint control of turbines with steam takeoff. Izv. vys. ucheb. zav.; energ. 6 no.9:6574 S 163. (MIRA 16:12)

1. Leningradskiy politekhnicheskiy institut imeni Kalinina. Predstavlena kafedroy turbinostroyeniya.

ACCESSION NR: AP4010491

S/0080/64/037/001/0202/0204

AUTHORS: Danilkin, V.I.; Kudryatsev, L.A.; Ivanov, V.A.

TITLE: Method of determining the nature of the electric conductivity of potassium glasses.

Zhurnal prikladnoy khimii, v.37, no.1, 1964, 202-204 SOURCE:

potassium glass, electrical conductivity, potassium ion, TOPIC TAGS: borosilicate glass

ABSTRACT: In the apparatus shown in the figure a series of runs were made at different current densities to determine the ratio of the electric charges to the mass of the charge carrier, and the current yield, in order to verify the ionic nature of electrical conductance in potassium glasses. In all cases the amount of potassium formed corresponded to the amount of electricity passed. This electricity was consumed in the ionic transfer of potassium from the potassium nitrate melt through the glass in a vacuum with its subsequent neutralization. A borosilicate glass containing 20 mol. % K20 was investigated and its conductivity was found to be caused only by the posi-


**APPROVED FOR RELEASE: 03/20/2001** 

CIA-RDP86-00513R000619120016-5"

ACCESSION MR: AP4010491
tive potassium ion. Orig. art. has: 1 figure, 1 table and 3 equations.

ASSOCIATION: None
SUBMITTED: 17Deo62 DATE ACQ: 14Feb64 ENGL: O1
SUB CODE: PH NR REF SOV: OOO OTHER: OO4

Cord 2/37

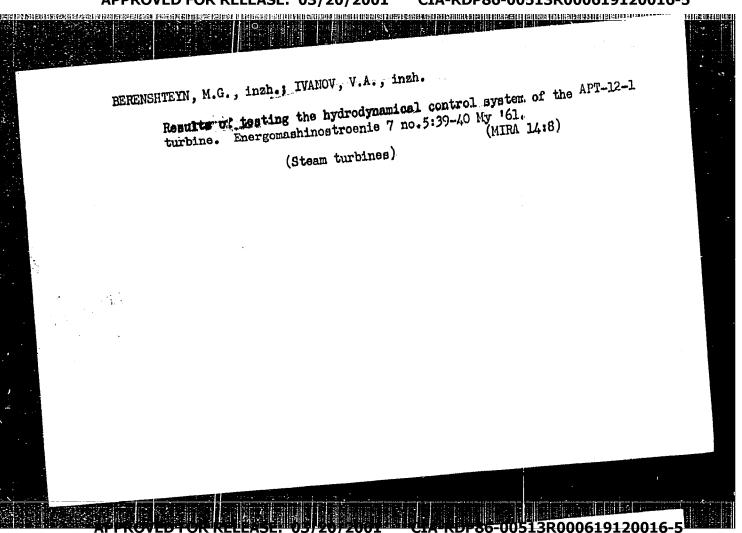

KIRILIEV, I.I., doktor tekhn.nauk; IVANOV, V.A., inzh.

Stability and transient regulation process of turbines with intermediate steam reheating. Teploenergetika (NINA 14:10) 60 0 161.


1. Leningradskiy politekhnicheskiy institut. (Steam turbines)

MARKUS, John; ALTAYEV, V.Ya., inzh.[translator]; BAYKOVSKIY, V.Ya., inzh.
[translator]; ZAYMOVSKIY, Ye.A., inzh.[translator]; KOROVYAKOV,
[translator]; MOKEYEV, O.K., inzh.[translator];
D.E., inzh.[translator]; MOKEYEV, Yu.A., inzh.[translator];
YAROSHEVSKIY, Yu.A., inzh.[translator]; YVANOV, Y.A., kand. tekhn.
neuk, red.; SOKOLOV, A.A., kand. tekhn. neuk, red.; BISKAKOVA, L.B.,
red.; DZHATIYEVA, F.Kh., tekhn. red.

[Handbook of electronic control circuits]Skhemy elektronnic avtomatiki. Pod red. i s predisl. V.A.Ivanova i A.A.Sokolova. Nomatiki. Pod red. i s predisl. V.A.Ivanova i A.A.Sokolova. Noskva, Izd-vo inostr. lit-ry, 1962. 342 p. Translated Trom: the English.
(Electronic control) (Electronic circuits) (NTRA 15:12)

(Automatic control)

APPROVED FOR RELEASE: 03/20/2001 CLA-RDP86-00513R000619120016-5

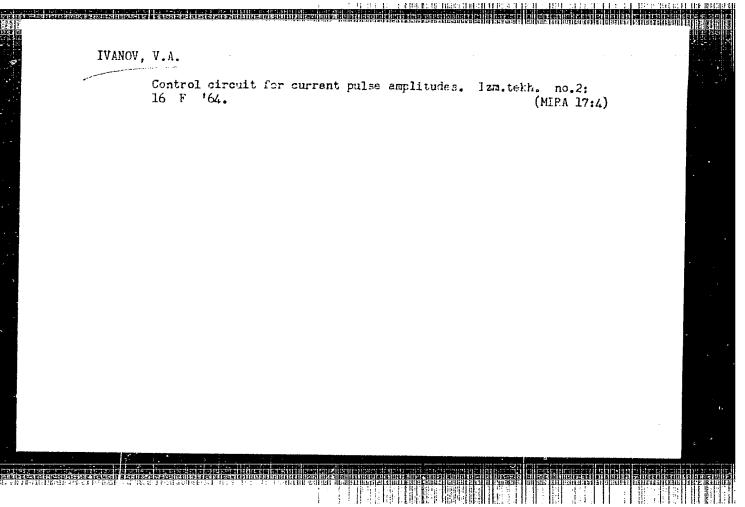


ALAHADV, I.J.; YABLON W., kand. tokhm. rank, cots., retuenzent; IVANOV, V.A., kand. tokhm. nauk, red.

[Theory of turbomachines] Tooriia turbomashin. Mockva.

Mashinostro nie, 1964. 510 p. (MIRA 17:8)

。
ACC NR. AP6009511  SOURCE CODE: UR/0413/55/000/005/0020/0021  AUTHOR: Ivanova. V. A.; Genkin, N. D.; Vorob'vev. V. D. Ginzburg, B.G.;  CRG: none  TITLE: Preparation of Captax-2-mercaptobenzothiazole. Class 12,  No. 179306 V announced by the Scientific Research Institute of Organic Dyes (Nauchno-issledovatel'skiy institut organicheskikh poluproductov i krasiteley i Bereznikovskiy anilinokrasochnyy zavoi)  SOURCE: Izobreteniya, promyshlennyye obraztsy, tovarnyye znaki,
ABSTRACT: An Author Certificate has been issued describing a method for preparing Captax-2-mercaptobenzothiazole by melting aniline, pressure, followed by dissolving the melt in a water solution of and separating the product. To improve the quality of Captax, decontaminate the waste water and make it possible to use the solution and contaminate the waste water and make it possible to use the solution and contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to use the solution contaminate the waste water and make it possible to

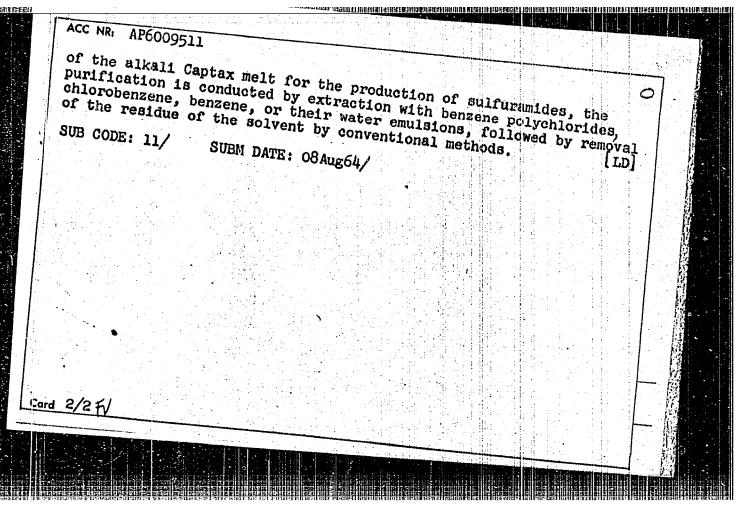

ACC NR. AP6030919 SOURCE CODE: UR/0207/66/000/004/0030/0037

AUTHOR: Ivanov, V. A. (Moscow)

ORG: none

TITLE: The break-up of a liquid jet


SOURCE: Zhurnal prikladnoy mekhaniki i tekhnicheskoy fiziki, no. 4, 1966, 30-37

TOPIC TAGS: such instruction, foot momitation, propulsion, biquid flow, gos flow flow craly is

ABSTRACT: An analysis was made of the break-up of a liquid jet discharging into a gas medium. In the experiments, the discharge velocity of the jet was varied by varying the velocity of the cocurrent or countercurrent gas stream, and the jet break-up was photographed. The experiments were carried out with water, glycerine, castor oil, and diesel fuel. In the analysis, equations were derived for the length and time before break-up of the jet, the effect of the perturbation wave length and wave number, and the effect of viscosity. Orig. art. has: 41 formulas and 9 figures.

SUB CODE: 20/ SUBM DATE: 15Jun65/ ORIG REF: 007

Card 1/1

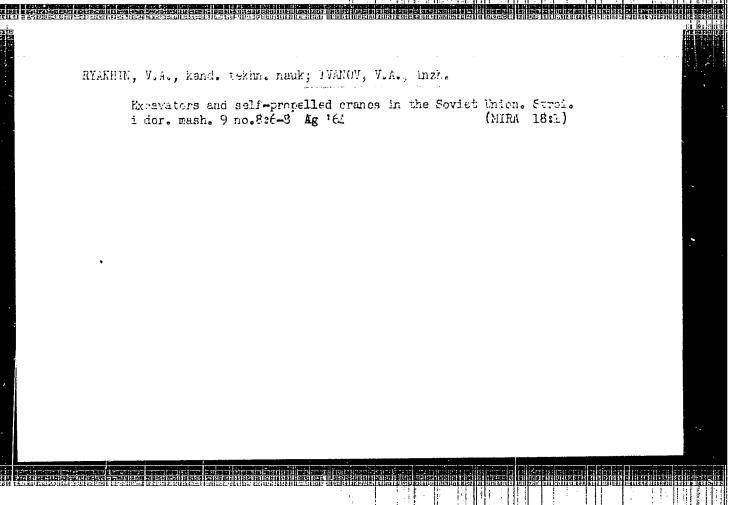

CHERNOSVITOV, Yu.L.; DZENS-LITOVSKIY, A.I.; IVANOV, V.A.; KULICHKOV, S.A., nauchm. red.

[Industry's requirements as to the quality of mineral raw materials; a handbook for geologists] Trebovaniia promyshlennosti k kachestvu mineral'nogo syr'ia; spravochnik dlia geologov. Moskva, Nedra. Nos.9, 77. 1965.

(MIRA 18:9)

1. Moscow. Vsesoyuznyy nauchno-issledovatel'skiy institut mineral'nogo syr'ya.

L 4010-66 EWT(d)
ACCESSION NR: AP5024407

UR/0286/65/000/015/0087/0087

AUTHOR: Ivariov, V. A.

Z I

TITLE: Method for determining the direction of the meridian. Class 42, No. 1.73429


SOURCE: Byulleten' izobreteniy i tovarnykh znakov, no. 15, 1965, 87

TOPIC TAGS: gyroscope system, gyrosextant

ABSTRACT: This Author Certificate presents a method for determining the direction of the meridian, using a two-stage floating gyroscope with its angular momentum directed vertically. To utilize the method in deep holes using gyroscopes with small angular momenta, a case containing the gyroscope is rotated about the vertical axis coinciding with the geometric axis of the gyroscope. The direction of the meridian is determined by the position of the established extreme value of the angle of deviation of the gyroscope. The motor rotating the case with the gyroscope inside is rotated at a constant rate. The magnitude of the extreme value of the deviation angle is determined by the subsequent interpretation of the signal recording from the deviation angle detector.

ASSOCIATION: Leningradskiy elektrotekhnicheskiy institut im. V. I. Ul'yanova (Lenina) (Leningrad Electrical Engineering Institute) UDC: 53.082.16

1 h010-66		والأراق والمستوار والمار والشار					
ACCESSION NR: AP5024407						O	
SUBMITTED: 22Jan64	ENCL:	00	SUB (	:ODE:	NG		
NO REF SOV: 000	OTHER:	000					
					1.7		
Card 2/2							
212/2							

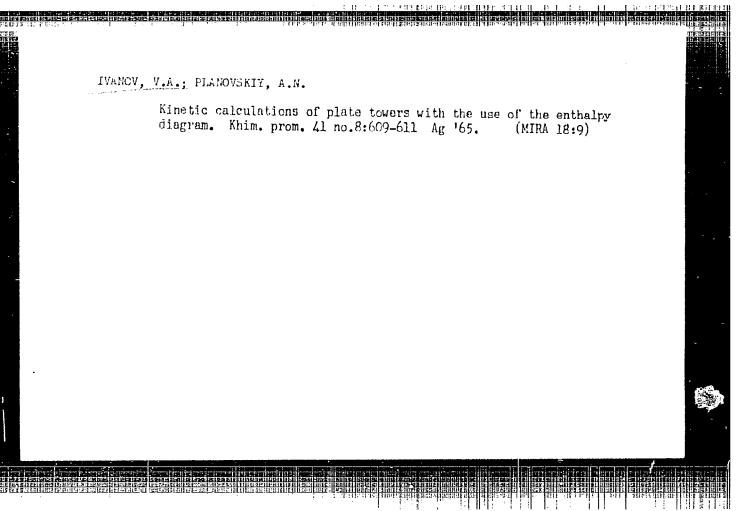

IVANOV, Nacility Hoksmarevich, laurest Leninskoy premii; Lifffilts, S.G., rec.

[On the path toward the new goals] Na puti k novym rubezham. Rostov-na-Donu, Rostovskoe knizhnoe izd-vo, 1964. 141 p.

(MIFA 18:3)

1. Fredsedatel' Soveta narodnogo khozyayatva Severo
Kavkazskogo ekonomicheskogo rayona (for lvanov).

BAKULEV, A.N., akademik; BUNYATYAN, A.A., kand. med. nauk;
BURAKOVSKIY, V.I., doktor med. nauk; BUYANOV, V.M., dots.;
GULYAYEV, A.V., prof.; ZAKETSKIY, V.V., doktor med. nauk;
IVANOV, V.A., prof.; KOLESNIKOV, S.A., prof.; LOBACHEV,
S.V., prof.; LOFUKHIN, Yu.M., prof.; MURATOVA, Kh.N., doktor
med. nauk; PETROVSKIY, B.V., zasl. deyatel nauki RSFSR, prof.;
SAVEL'YEV, V.S., prof.; SERGEYEV, V.M., doktor med. nauk;
SOLOV'YEV, G.M., prof.; SOLOV'YEVA, I.F.; BURAKOVSKIY, V.I.,
red.

[Multivolume manual on surgery] Mnogotomnoe rukovodstvo po khirurgii. Moskva, Meditsina. Vol.6. Pt.1. 1965. 577 p. (MIRA 18:10)


1. Deystvitel'nyy chlen AMN SSSR (for Petrovskiy).

IVAHOV, V.A., prote; at Nov., V.a., 1978, V.A.

Complications inflowing reviews company to caret. V. Nov. otomach and esoplague. Sov. mest. 28 no.326-11 Mr 165.

(MRA 18:10)

1. Kafedra obshchey khirargii (20v. prof. V.A. canov) ischelmogo fakul teta II Meskovskogo mentunaknyo instituta imedi N.I. Pirogova.

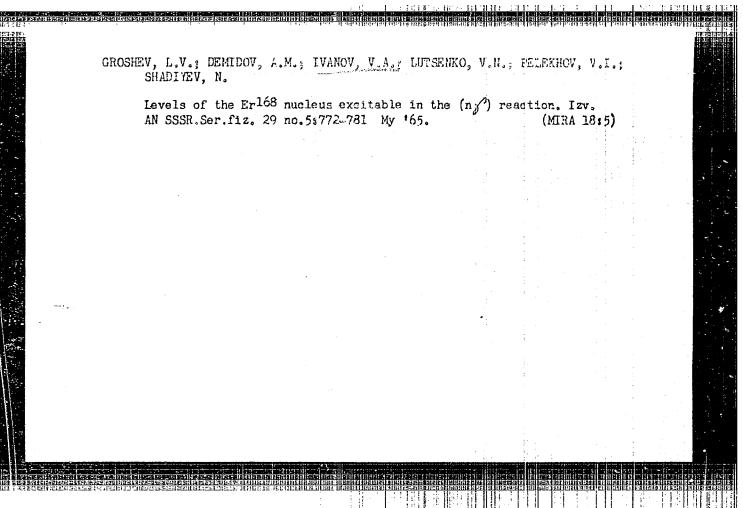


表现的表示。	두 등 변경 (2년(6년 11월 14년 1년 1년) 경 (1년 5년) 전 (1년 1년 1
L 54785-65 EWT(m) Peb DIAAP ACCESSION NR: AP5013994	· · · · · · · · · · · · · · · · · · ·
	UH/0048/65/089/005/0778/0781
Victory V T Charley I	; Ivanov, V.A.; Lutsenko, V.N.; Pald
TITLE: Levels of arbium 168 excit	ed by neutron capture (Report, 15th roscopy and the Structure of the
26 Ja	in-8 Fab 1965/

SOURCE: AN SSSR.Izvestiya.Seriya fizicheskaya, v.29, no.5, 1965, 772-781

TOPIC TAGS: gamma ray spectrum, neutron capture, eridum, internal conversion

ABSTRACT: The gamma rays between 0.5 and 8 MeV from the Er-67(1,7).


Er-68 reaction were investigated with a magnetic Compton spectrometer with a resolution of 0.3% for samma ray emergies above 2 Nev Sia spectrometer has been described elsewhere (L.v. Gross ev. 18 Demidov, v.N. Lutsenka and A.F. Malov, IR AN SSSR.Ber-fiz.24.791 insc.). The

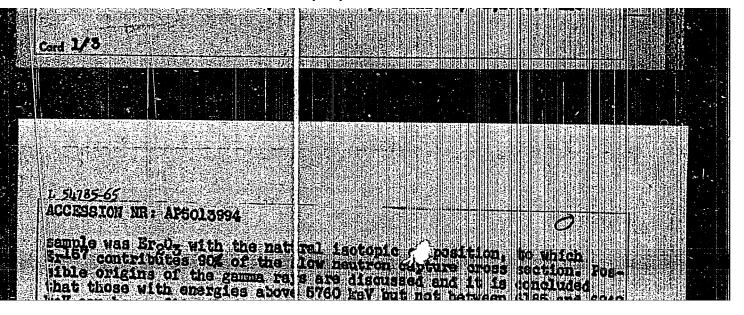

"APPROVED FOR RELEASE: U3/20/2001

CIA-RDF00-00515R000512


Interest of the gamma rays are discussed and ff is concluded that those with energies above 5760 keV out not between 1.65 and 6248 leV can be confidently assigned to Enice. Nineteen such samma rays are tabulated; there are also tabulated 13 gamma rays with energies between 5000 and 5760 keV out that the cright is in doubt and 25 with energies between 5000 and 5760 keV which are ascribed to Enico. The catillates are reletive intensities were converted to absolute intensities by norm. relative intensities were converted to absolute intensities by normalizing the total radiata: anargy to the neutron binding smerey. White the man was a series of the series of

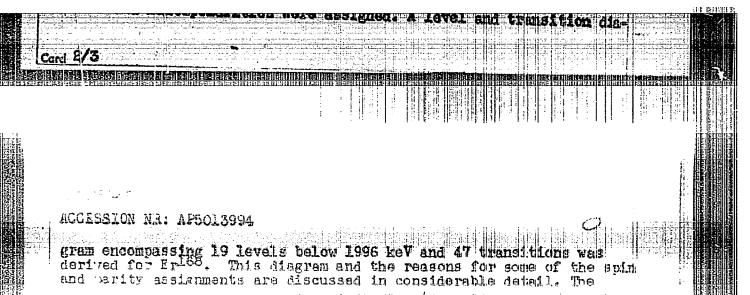

ASSOCIATION: none

SUBMITTED: 00 ENGL: 00 SUB CODE: NP

NR REF SOV: 005 OTHER: 007

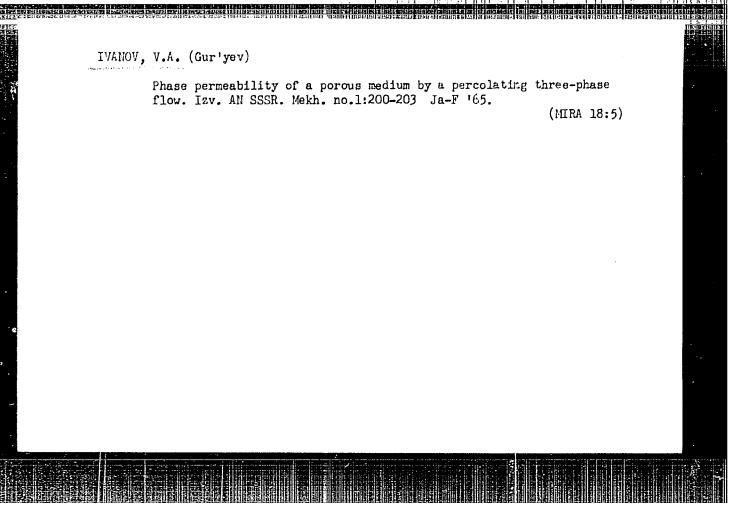

APPROVED FOR RELEASE: 03/20/2001 CIA-RDP86-00513R000619120016-5"

ALEKHIN, F.K.; ALOTIN, L.M.; ALTAYEV, Sh.A.; ANTONOV, P.Ye.;

BEVZIK, Yu.Ya.; BELEN'KIY, D.M.; BRATCHENKO, B.F.,

gornyy inzh.; BRENNER, V.A.; BYR K., 7.F.; VAL'SHTEYN,

G.I.; YERMOLENOK, N.S.; ZHISLIN, I.M.; IVANOV, V.A.;

IVANCHENKO, G.Ye.; KVON, S.S.; KODYK, G.T.; KREMENCHUTSKIY,

N.F.; KURDYAYEV, B.S.; KUSHCHANOV, G.K.; MASTER, A.Z.;

PREOERAZHENSKAYA, Ye.I.; ROZENTAL', Yu.M.; RUDOY, I.L.;

RUSHCHIN, A.A.; RYBAKOV, I.P.; SAGINOV, A.S.; SAMSONOV,


M.T.; SERGAZIN, F.S.; SXLEPCHUK, V.M.; USTINOV, A.M.;

UTTS, V.N.; FEDOTOV, I.F.; KHRAPKOV, G.Ye.; SHILENKOV, V.N.;

SHNAYDMAN, M.I.; BOYKO, A.A., retsenzent; SUROVA, V.A.,

ved. red.

[Mining of coal deposit: in Kazakhstan] Razrabotka ugolinykh mestorozhdenii Kazakhstana. Moskva, Nedra, 1965. 292 p. (MIRA 18:5)

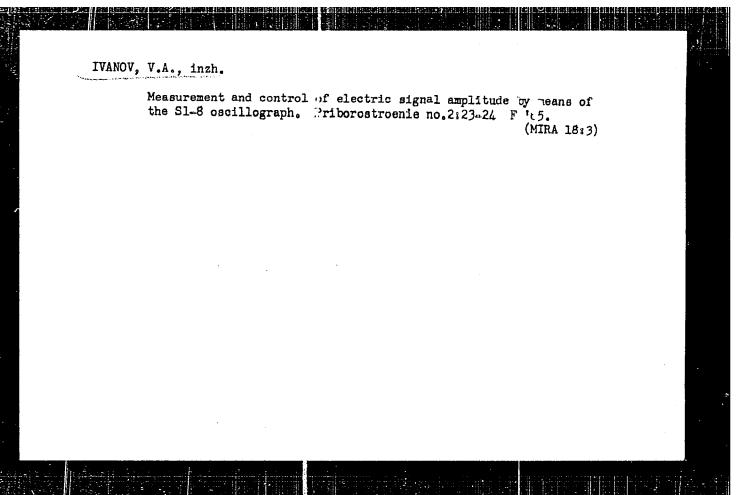

IVANOV, V.A.; STEPANOVA, N.M.; POGORELOVA, M.V.

Experimental basis for the maximum permissible butyl acrylate concentration in the water of reservoirs and rivers. San. okhr. vod. ot zagr. prom. stoth. vod. no.6:134-146

(MIRA 18:3)

l. Kafedra gigiyeny Voronezhskogo meditsinskogo instituta i laboratoriya Voronezhskogo filiala Vsesoyuznogo nauchno-issledovatel'skogo instituta iskusstvennogo kauchuka imeni S.V.Lebedeva.

IVANOV, V.A., prof.; MOLODENKOV, M.N., dotsent

Introduction of drugs into the arterial blood stream. Khirurgiia 40 no.4258-63 Ap '64 (MINA 18:1)

1. Kafedra obshchey khirurgii (zwv. - prof. V.A. Ivanov) lecheimogo fakuliteta II Moskovskogo gosudarstvennogo meditsinskogo instituta immi N.I. Pirogova.

CHAKABAYEV, S.Ye.; IMASHEV, N.U.; TOKAREV, V.P.; KONONOV, Yu.B.; KORSUN, P.Ye.; VOTSALEVSKIY, E.S.; IVANOV, V.A.; FARAFONOVA, N.V.; SHAKHOVOY, A.I.

Uzen' gas and oil field; outline of geology and oil and gas potentials.

Izv. AN Kazakh. SSR. Ser. geol. 21 no.4:16-30 Jl-Ag '64. (MIRA 17:11)

1. Institut geologii i geofiziki, Gur'yev.

IVANOV, V.A.

Production of high-quality turpentine. Gidroliz. i lesokhim.prom. 15 no.1:24-25 62. (MIRA 18:3)

1. Kiyevskiy lesokhimicheskiy kombinat.

IVANOV, V.A.; MURZAYEV, P.M.

Conference on the geology of sulfur. Sov. geol. 6 no.11: 153-156 N 163. (MIRA 17:1)

1. Gosudarstvennyy geologicheskiy komitet SSSR i Kishinevskiy geologicheskiy institut.

IVANOV, Vasiliy Alekseyevich; MOLODENKOV, Mikhail Nikolayevich;

IOPUKHIN, Yuriy Mikaylovich; PISAREVSKIY, A.A., red.

(Surgery] Khirurgiia. 2. 12d., perer. 1 dop. Moskva,


Meditsina, 1965. 445 p. (MIRA 18:7)

APPROVED FOR RELEASE: 03/20/2001 CIA-RDP86-00513R000619120016-5"

MELESHIN, S.M., kand. tekhn. nauk; IVANOV, V.A., inzh.

Ways of expanding iron on mining in the U.S.S.R. Shakht. stroi. 8 no.5:1-4 My 64 (MIRA 17:7)

1. Gosplen SSSR (for Meleshkia), 2. Cosudarstvennyy komitet po chernoy i tavetnoy metallurgii pri Gosplane SSSR (for Ivanow).

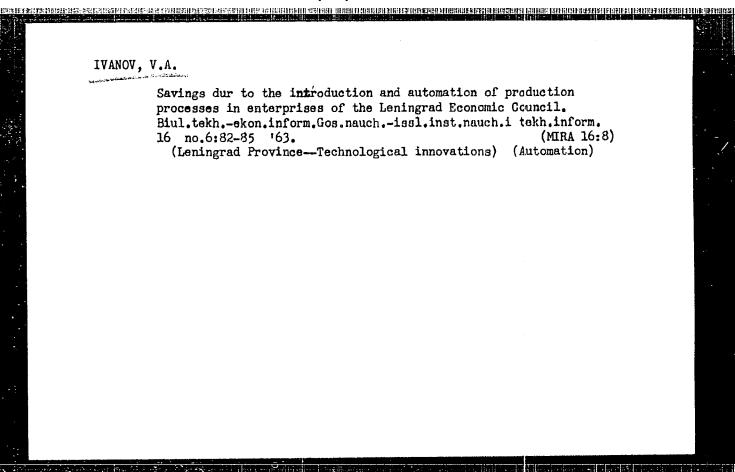


SMIRNOV, Dmitrly Vasil'yevici, dots.; TANASEVICH, Valerian Grigor'yevich, kand. yurid. nauk; IVANOV, V.A., dots., otv. red.; TIKHONOVA, G.P., red.


[Principles of accounting and forensic accounting expertise] Osnovy bukhgalterskogo ucheta i sudebno-bukhgalterskoi ekspertizy. Leningrad, Izd-vo Leningruniv., 1964. 139 p. (MIRA 18:1)

1. Ekonomicheskiy fakulitet Leningradskogo gosudarstvennogo universiteta (for Smirnov). 2. Vsesoyuznyy institut po izucheniyu prichin i razrabotke mer preduprezhdemiya prestupnosti (for Tanasevich).

IVANOV, V.A.

Surveys of the degree of technological standards of production in enterprises of the Leningrad Economic Council. Eul. tekh.-ekon. inform. Gos. nauch.-issl. inst. nauch. 1 tekh. inform. 17 no.3:86-88 '64. (MIRA 17:9)

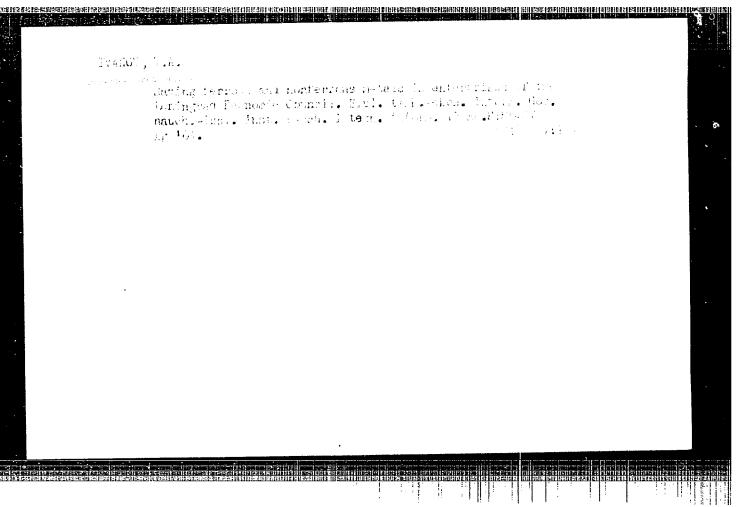

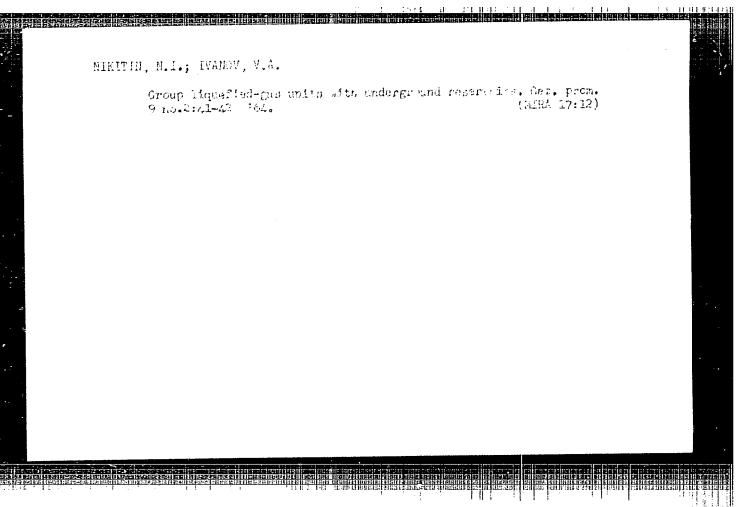

IOFIN, S.L., gornyy inzh.; IVANOV, V.A., gornyy inzh.; SEPIL'BEEG, B.A., gornyy inzh.; KUVAYTSLV, A.A., gornyy inzh.

Specification for complex ores. Gor. zhar. no.7:7-9 J1 '64.

(MIRA 17:10)

1. Vsesoyuznyy nauchno-isslodovatel'skiy institut tsvetnoy metallurgii (for Iofin, Ivanov, Shpil'berg). 2. Gosudarstvennyy institut po proyektirovaniyu predpriyatiy tsvetnoy metallurgii (for Kuvuytsev).

#### CIA-RDP86-00513R000619120016-5 "APPROVED FOR RELEASE: 03/20/2001

L 03620-67 EWT(1) SOURCE CODE: UR/0106/66/000/006/0044/0052 ACC NR: AP6019012 AUTHOR: Belov, L. A.; Blagoveshchenskiy, M. V.; Ivanov, V. A.; Kapranov, M. V.; Utkin, G. M.; Khryunov, A. V. ORG: none TITLE: Automatic phase control in amplifiers [Reported at the MEI Annual Conference and at the NTORIE Conference, 1964/ SOURCE: Elektrosvyaz', no. 6, 1966, 44-52 TOPIC TAGS: electronic amplifier, rf amplifier, automatic phase control ABSTRACT: A possibility is discussed of stabilizing the phase of an rf amplifier by means of an automatic-phase-control feedback loop. Phase modulator PhM (see figure) is intended for RFA PhM compensating phase drifts that arise in rf amplifier RFA; In these two devices may be designed as a joint unit or as separate units. Phase detector PhD produces an error signal which is due to a deviation of the output-input phase PhD LFF UDC: 621.396.647 Card 1/2

L 03620-67

ACC NR: AP6019012

difference from its nominal value. To reduce this error signal to zero, a phase shifter is connected to one of the PhD inputs; this makes a phase difference reference unit. The error signal between PhD and PhM can be amplified by a d-c amplifier with a 1-f filter LFF, which should take into account the inertia of the d-c amplifier and PhD. The error signal e applied to PhM corrects the phase deviation. Stabilizing characteristics of the automatic phase control are studied by setting up and examining its differential equations. The operation of the automatic phase control is illustrated by an example of a simple single-circuit resonant rf amplifier, with a reactance tube playing the role of PhM. The small-disturbance stability of the automatic-phase-control system is investigated for the cases of single-section and two-section RC filters. Orig. art. has: 7 figures and 29 formulas.

SUB CODE: 09 / SUBM DATE: 20Jan65 / ORIG REF: 003

Card 2/2

varu 1/1 424/12

VDC: 621.372.543.3

0

L 08965-67

ACC NR: AP6021916 (A) SOURCE CODE: UR/0108/66/021/003/0038/0043

AUTHOR: Ivanov, V. A.

20

ORG: Scientific and Technical Society of Radio Engineering and Electro-communication im. A. S. Popov (Nauchno-tekhnicheskoye obshchestvo radiotekhniki i elektrosvyazi)

TITLE: Double-T feedback loop in a low-input-impedance transistorized amplifier

SOURCE: Radiotekhnika, v. 21, no. 3, 1966, 38-43

TOPIC TAGS: electronic amplifier, transistorized amplifier, negative feedback, feedback amplifier

ABSTRACT: Design formulas for the transistorized amplifier with a double-T-bridge negative feedback are developed, as well as the relations showing the effect of load on the bridge and RC-filter characteristics. A practical transistorized

Card 1/2

UDC: 621.372.52

Cord 2/2 335

L 06586-67 EWT(1)UR/0431/66/001/002/0127/0130 SOURCE CODE: AP6029004 ACC NR: AUTHOR: Asatiani, T. L.; Gazaryan, K. A.; Zhmyrov, V. N.; Ivanov, V. A.; Matevosyan, E. M.; Nazaryan, A. A.; Filozov, A. F.; Sharkhatunyan, R. O. ORG: Institute of Physics GKAE (Institut fiziki GKAE) TITLE: On the possibility for measuring ionization of charged particles in a streamer chamber SOURCE: AN ArmSSR. Izvestiya, Fizika, v. 1, no. 2, 1966, 127-130 TOPIC TAGS: ionization chamber, particle track, charged particle, neon, proton beam ABSTRACT: Data are given from experiments conducted to determine the possibility of measuring the specific ionization of charged particles in a streamer chamber. The LYaP synchrocyclotron at OIYaI was used for passing protons with energies of 660, 200, 100 and 50 Mev through a streamer chamber measuring 50×35×15 cm filled with pure neon to a pressure of 1 atm. The results show 1.8±0.4 luminescent centers per cm of the proton track with a root-mean-square deviation of 0.29 mm from the approximating straight line. Microphotometric analysis of the films shows that the proposed method may be used for measuring the ionization of charged particles. In conclusion the authors thank Corresponding member AN SSSR A. I. Alikhanyan and Doctor of physical and mathematical sciences A. A. Tyapkin for cooperation and interest in the work. The authors are especially grateful to Candidate of physical and mathematical sciences Card 1/2

A. F. Pisarev for assistance in carrying out the experiment and for useful discussions and also to V. N. Prokhorov for direct assistance with the measurements and to Yu. A. Zanevskiy for cooperation in the work. Orig. art. has: 3 figures.									Α.
SUB CODE	: 20/	SUBM DATE:	05Sep65/	ORIG REF:	002/ OT	H REF:	002		
				•	•				
									-
				•					
			•						

第一个大学的 1955年,1955年,1955年,1955年,1955年,1955年,1955年,1955年,1955年,1955年,1955年,1955年,1955年,1955年,1955年,1955年,1955年,1

OBRUCHE'A, Nataliya Vladimirovna; IVANOV, V.B., kand. biol. nauk, otv. red.; VASIL'YEVA, L.N., red.

[Physiology of growing root cells] Fiziologiia rastushchikh kletok kornia. Moskva, Nauka, 1965. 109 p. (MIRA 18:9)

BARKOV, N.I., mladshiy nauchnyy sotrudnik; IVANOV, V.B., kand.geograf.nauk Contact method of photographing snow and firm specimens. Inform.

biul. Sov. antark. eksp. no.45:45-47 64.

(MIRA 18:1)

1. Arkticheskiy i antarkticheskiy nauchno-issledovatelskiy institut (for Barkov). 2. Ieningradskiy gosudarstvennyy universitet im. A.A.Zhdanova (for Ivanov).

LEBEDEV, S.M.; IVANOV. V.B.; KASHTANOV, F., red.; STEPANOVA, J., tekhn.red.

[People's housing construction projects] Opyt zhilishchnogo stroitel'stvs metodom merodnoi stroiki (gor.Gomel'). Minsk, Gos.izd-vo BSSR, 1958. 50 p. (MIRA 13:1) (Gomel'--Building)